F – CAR FLOOR
A – JAMB HEIGHT
H – CAR HEIGHT, FLOOR INCLUDED
D – SHOES DISTANCE BETWEEN CENTERS
P – CAR DEPTH
L – CAR EXT. WIDTH

TWIN PISTONS HYDRAULIC CAR FRAME

LOAD Q=3500 Kg.

Instantaneous safety gear "PI 44"

Max speed 0,63 m/sec

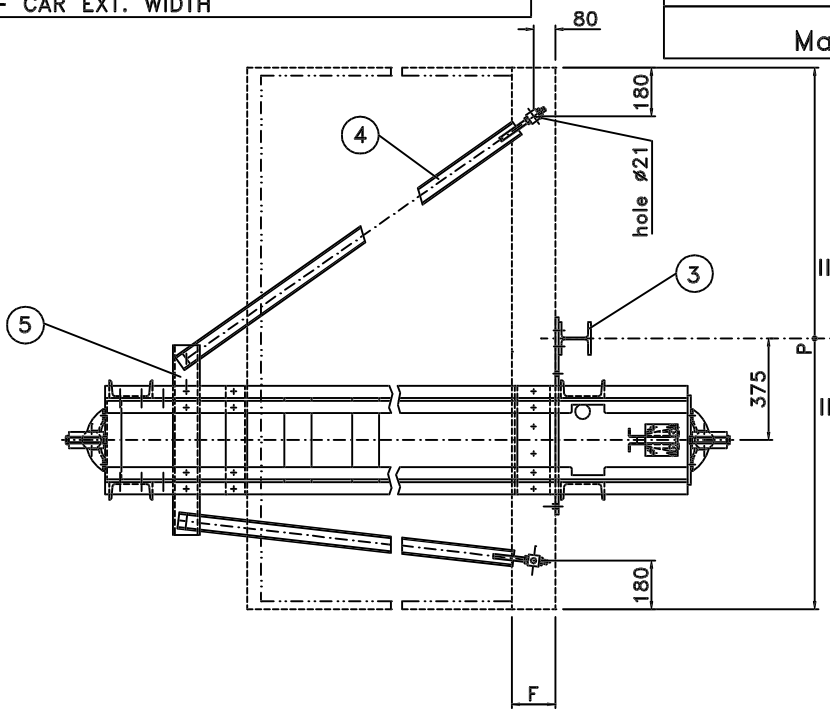

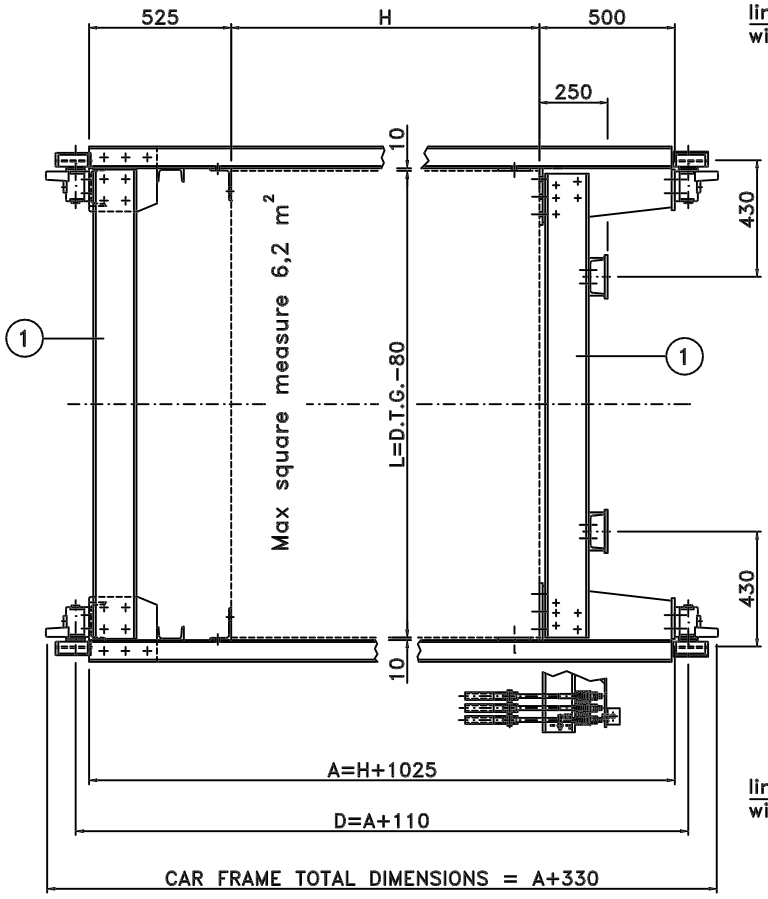

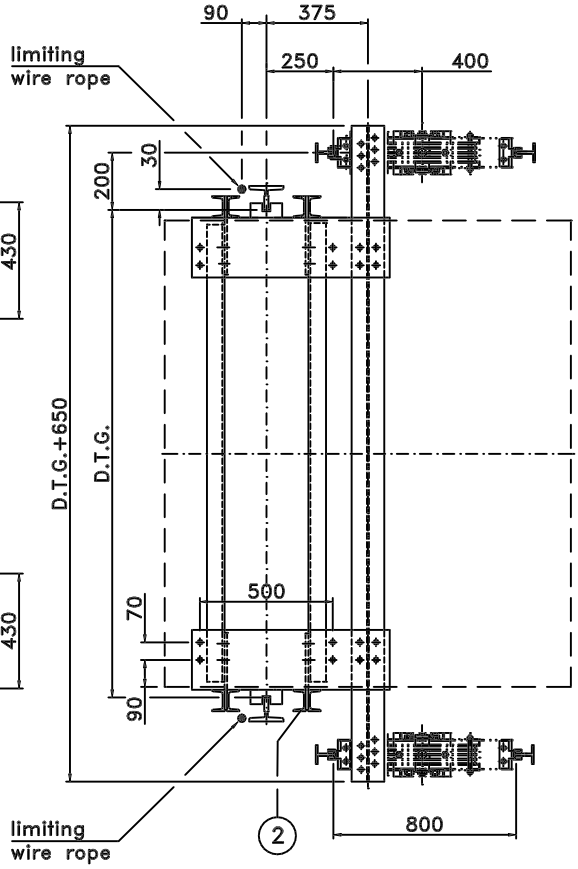

ELEMENT	Q.TY	PROFILES SECTION	
1	04	⊔	UNP 160
2	08	⊔	UNP 80
3	01	I	HEB 120
4	04	⊔	UNP 60
5	02	⊔	UNP 100
6			